




# XNet NODE

---

## XNet Node

High performance professional lighting network node, for different scale lighting control system. Supports the Art-Net and sACN network protocol, XNet node can be configured with any web browser. There are 2' TFT LCD display on the front panel, display the Node status, Node ID, and DMX512 port ID and Status. User can use the encoder that beside the LCD to modify some important parameters.



### Feature:

- Compact, Flexible, Powerful Art-Net, sACN DMX Node
- Up to 44Hz DMX update rate
- Configurable DMX update rate and Break time, working with any fixture and DMX equipment.
- 2' TFT LCD, Show the Port info, network status and node info
- Ports individually configurable Art-Net to DMX or DMX to Art-Net .
- sACN to DMX
- RDM support
- Merge, Backup, Combine function from DMX port or Art-Net source and output to DMX port or Art-Net Universe
- 10/100BT Ethernet, support AUTO-MIDX
- Power by POE(Power over Ethernet, IEEE80203af) or 24VDC auxiliary power supply
- Configured with a standard web browser such as IE9, Firefox
- Encoder knob provide front panel configuration
- Monitor all the online SND nodes status in Web Browser
- Monitor each port DMX data in Web Browser
- 2 port in Wall mount version and Rack mount, 4 or 8 port in Rack mount version
- Accessory for truss-mount






# XNet NODE

## Introduction of Web Configuration

Status page shows Device Name, User Name, IP Address, Subnet Mask, Gateway, and the Firmware Version for this device.

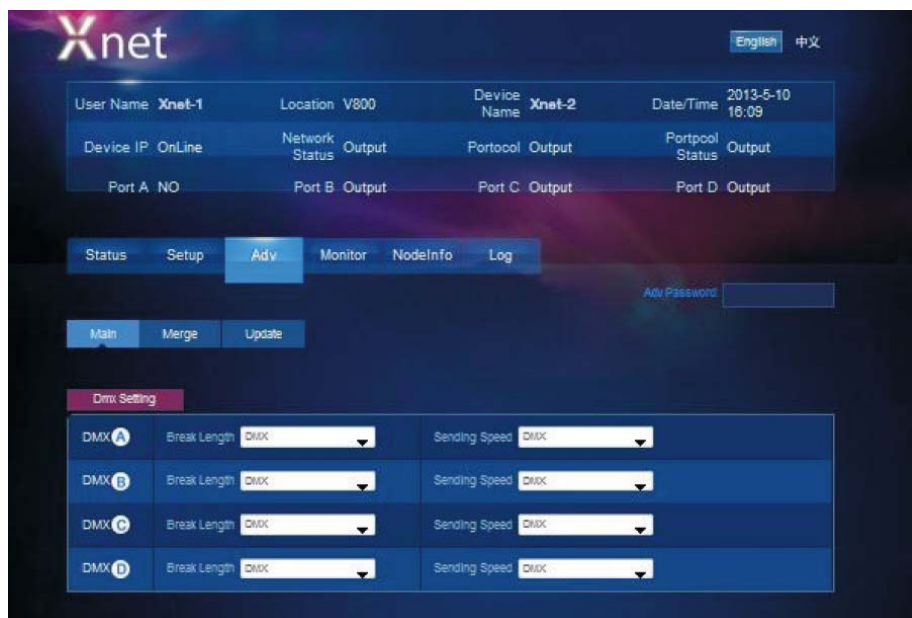

## Web Browser Configuration

### Connectivity

2 port: 5 pin XLR x2 Ethercon x 1 24V DC x 1  
4 port: 5 pin XLR x4 Ethercon x 1 24V DC x 1  
8 port: 5 pin XLR x8 Ethercon x 1 24V DC x 1

### Power Supply

2, 4 port: POE or 24V DC Power Supply  
8 port: 24V DC Power Supply

### Environmental Data

Working Temperature: 0°C-40°C Storage Temperature: -40°C-70°C  
Humidity: 5%-95% non-condensing

### Mechanical Data:

Construction: Steel enclosure

2 port: Wight: 1.4Kg Size: 44(High)X485 (wide) X160(Deep) (mm)  
4,8 port: Wight: 2.2Kg Size: 44(High)X485 (wide) X160(Deep) (mm)

### Order information

#### Model Description

X-2R 2 Port, Rack Mount, Black Panel, XLR in Front  
X-2W 2 Port, Wall Mount, (Portable) Black Panel  
X-4R 4 Port, Rack Mount, Black Panel, XLR in Front  
X-8R 8 Port, Rack Mount, Black Panel, XLR in Front