


垂直吊杆
Telescope Hoist
型号(Model): GCZ



北京星光影视设备科技股份有限公司
Beijing Xingguang Film & TV Equipment Technologies Co., Ltd.
电话TEL: 010-60251751/2/4 60252366
售后服务热线: 010-60253438
After-sales Service Hotline: 010-60253438
网址URL: <http://www.starlighting.com.cn>

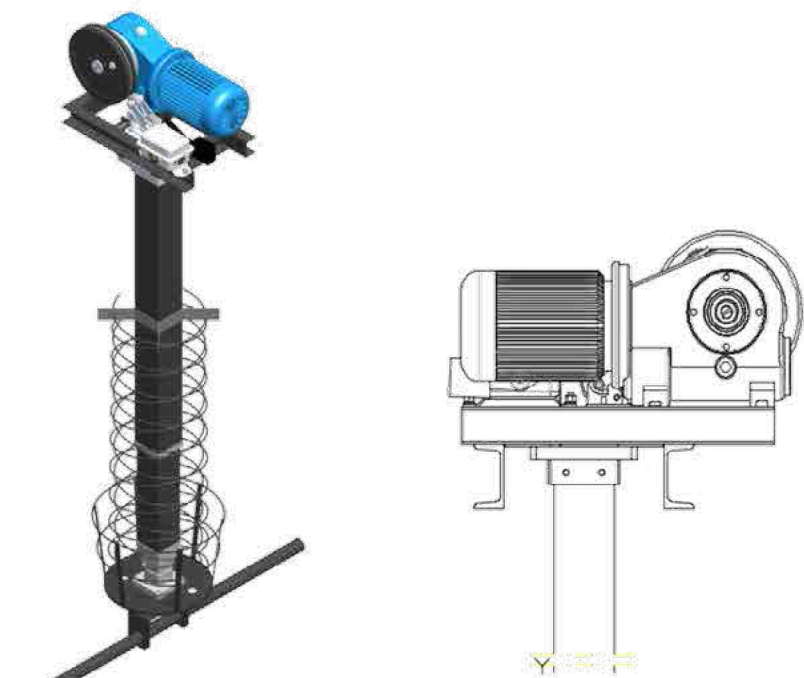

安装形式 Installation

特点概述


- ★ 铝型材方管伸缩结构，导向性好，刚性强，运行平稳；
- ★ 占用空间小，安装简单方便，便于维护；
- ★ 360度旋转横杆，使用更灵活，布光无死角；
- ★ 配置多种安全保护装置，确保吊杆运行安全可靠；
- ★ 可配置高精度位置传感器，实现吊杆精确定位。

Features Overview

- ★ Square aluminum profile telescope makes the hoist good rigidity and operates smoothly with good orientation.
- ★ Compact design. Easy to install and maintain.
- ★ 360 degree rotation bar. Align fixture flexibly without blind area.
- ★ There are variety of safety protection devices to guarantee that the operation is safe and reliable.
- ★ The high accuracy position sensor is adopted which realizes the accurate positioning.

产品规格 Product Specification

主要参数 Technical Data					
型号 Model	GCZ-				
	8000	9000	10000	12000	14000
伸展长度 Stretching length (m)	8	9	10	12	14
收缩长度 Shrinkage length (m)	1.4	1.5	1.7	1.9	2.2
减速电机类型 Type of gear motor	蜗轮蜗杆减速机、斜齿-螺旋锥齿轮减速机（配双制动电机+手动释放）两种可选 Worm-gear motor, helical-bevel gear motor (with double brake motor+manual release)				
吊点数量 QTY of suspension points	2				
提升速度 Speed (m/min)	10m/min				
最大载荷 Maximum load (kg)	200/400				
电机功率 Motor power (kw)	1.5/2.2				
滚筒类型 Drum type	盘式多层缠绕 Disc-type multi-layer winding				
吊杆自重 Self-weight (kg)	41.5	43	44.5	47.5	58
钢丝绳直径 Diameter of wipe rope (mm)	φ3.6/φ4.2				
安全装置 Safety device	防冲顶限位器、松断绳限位器、升降限位器、位置传感器 Anti-collision limiting Stopper, Loose-rope Stopper, Limit switch, Position sensor.				
电气配置 Electrical configuration	强电回路2路；DMX512 2路 Power X 2; DMX512 X 2				
备注 Remarks	自重不含提升机和电缆。Self-Weight does not include gear motor and cables.				

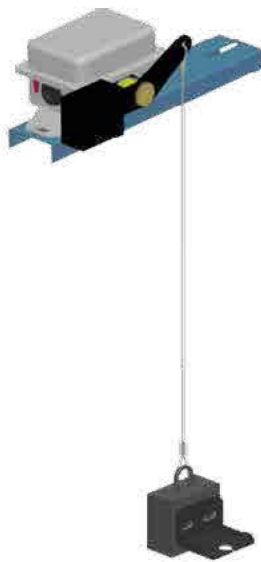

防冲顶限位器
Anti-collision
limiting stopper



升降限位器
Limit switch



位置传感器（选装）
Position sensor
(Optional)